

Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019/AC:2021 for:
Single product

NATRE

– Inward opening Tilt & Turn window (GENP FI TITU)

From



Programme:

The International EPD® System, www.environdec.com

Programme operator:

EPD International AB

EPD registration number:

IES-0012249

Publication date:

2025-06-20

Valid until:

2030-06-20

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): <i>PCR 2019:14 Construction products (EN 15804:A2)(1.3.4)</i> <i>PCR 2019:14-c-PCR-007 c-PCR-007 Windows and doors (EN 17213) (2024-04-30)</i>
PCR review was conducted by: The <i>Technical Committee of the International EPD System</i> . See www.environdec.com for a list of members. Review Chair: <i>Claudia A. Peña, University of Concepción, Chile</i> The review panel may be contacted via the Secretariat www.environdec.com/contact .
Life Cycle Assessment (LCA)
LCA accountability: <i>Tyréns Sverige AB, Anna Pantze</i>
verification
External and independent ('third-party') verification of the declaration and data, according to ISO 14025:2006, via EPD verification through:
<input checked="" type="checkbox"/> Fully pre-verified EPD tool
Third-party verifier: <i>Pär Lindman, Miljögraff AB</i>
Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but registered in different EPD programs, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD:

Natre Vinduer AS, Engenvegen 1, 2827 Hunndalen

Contact:

Manoli Ly Pedersen, Global Product Sustainability Specialist, Dovista

Tel. direct +45 6025 1653

E-mail maly@dovista.com

Description of the organisation:

Natre Vinduer AS is among the foremost window manufacturers in Norway and is the largest supplier of windows to Norwegian homes, distributed through building supply dealers. Natre has its roots in Gjøvik, tracing its history back to the 1950s and currently operates two factories in Norway. The production includes windows, balcony doors, and sliding glass doors, all of which are designed to be energy efficient and features a diverse selection of glazing units.

Natre is a part of DOVISTA A/S, a leading manufacturer of facade windows and doors in Europe.

Dovista is a part of VKR Group. Natre, organization no. 988 357 995, is a trademark used under license by DOVISTA A/S.

Product-related or management system-related certifications:

At the GENP FI TITU factory, we have certified our quality management according to the requirements of ISO 9001 and our environmental management according to ISO 14001. Our efforts are subject to an independent assessment and certification by Bureau Veritas.

Name and location of production site(s):

Svenska Fönster AB, Snickarvägen 12, SE-828 30 Edsbyn

Product information

Product name: NATRE – Inward opening Tilt & Turn window (GENP FI TITU)

Product description:

Natre inward opening Tilt and Turn (GENP FI TITU) are stylish and sophisticated inward opening triple-glazed windows in wood with aluminum cladding. The GENP FI TITU system offers both windows and casement doors, all custom-made and come in several opening functions. The slim sashes maximize natural daylight, and whether in a ribbon run or as a single unit, GENP FI TITU windows provide a valuable component to contemporary styling. The windows are suitable for commercial buildings, multi-plot housing and domestic projects. GENP FI TITU units are made to measure, drained and ventilated, and factory finished. They are manufactured in accordance with EN 14351-1-2006+A2 2016+NA 2017.

Opening functions are tested according to and third-party verified for:

- Resistance to wind load (Test: EN 12211:2016, Classification: EN 12210:2016)
- Watertightness (Test: EN 1027:2016, Classification: EN 12208:1999)
- Air permeability (Test: EN 1026:2016, Classification: EN 12207:2016)
- Load-bearing capacity of safety devices (EN 14351-1:2006 +A2:2016+NA 2017)
- Thermal transmittance (EN ISO 10077-2:2017)
- Acoustic performance rating (EN ISO 10140-2:2021)

We use pine from Northern European forests for frames, sashes/casements, glazing bars, mullions, and transoms. All suppliers are certified according to FSC and/or PEFC.

When treating the surface of the wood, we use a water-based diffusion open system called 2-ØKO from Sherwin Williams Sweden AB.

Approach to chemicals (hazardous substances)

We prioritize environmental protection when it comes to hazardous substances. Our suppliers are required to ensure that their products comply with any relevant legislation. To be approved as one of our suppliers, the supplier must sign our code of conduct, and comply with our restrictions on hazardous substances. Our restrictions prohibit products that contain hazardous substances in concentration that exceed the maximum values listed in the applicable relevant laws, as well as products that exceed the maximum concentration values limited by DOVISTA's internal requirements (<https://dovista.com/interesseret/leverandoer/hazardous-substances-restriction/>). Our Hazardous Substances Restrictions Appendix A list is regularly updated according to relevant laws, contains material and chemical substances related to the following regulations and directives:

- REACH Registration, Evaluation and Authorization of Chemicals (REACH) European Union (1907/2006/EC) (annex XIV, annex XVII and candidate list). The candidate list may be found at Candidate List of substances of very high concern for Authorisation (<https://echa.europa.eu/candidate-list-table>)
- Restrictions of Hazardous Substances (RoHS) European Union (65/2011/EU)
- Battery Directive (2006/66/EC)
- Packaging and Packaging Waste Directive (EU) 2018/852 + (94/62/EC)
- CLP Regulation (EC) No 1272/2008 (Regulation on classification, labelling and packaging of substances and mixtures (EC) No 1272/2008)
- Biocidal Product Regulation (528/2012/EU)
- Substances that deplete the ozone layer Regulation (1005/2009/EC)
- Persistent Organic Pollutants Regulation (2019/1021/EU) + (2020/1021/EU)
- Conflict Minerals (EU) 2017/821 + (EU) 2019/821

UN CPC code: 54

Geographical scope:

Module A1 and A2 Material suppliers are Global

Module A3 production is located in Sweden

Module B2 and B4 scenario is for Norway

A5, C and D scenarios are for Europe

LCA information

Declared unit: 1 m²

Conversion factor for the product is 34.7 kg per m²

Reference service life: 50 years


Time representativeness: The LCA is based on production data from 2023 but is deemed to be representative of an average year of production.

Database(s) and LCA software used: The LCA software is SimaPro Flow version 2.47 and the database is Ecoinvent 3.9.1. When modelling in Simapro, Ecoinvent data (updated November 2022) has been used for generic data.

Description of system boundaries:

Cradle-to-gate (A1-A3), with modules A5, B2, B4, C1-C4, and D

System diagram:

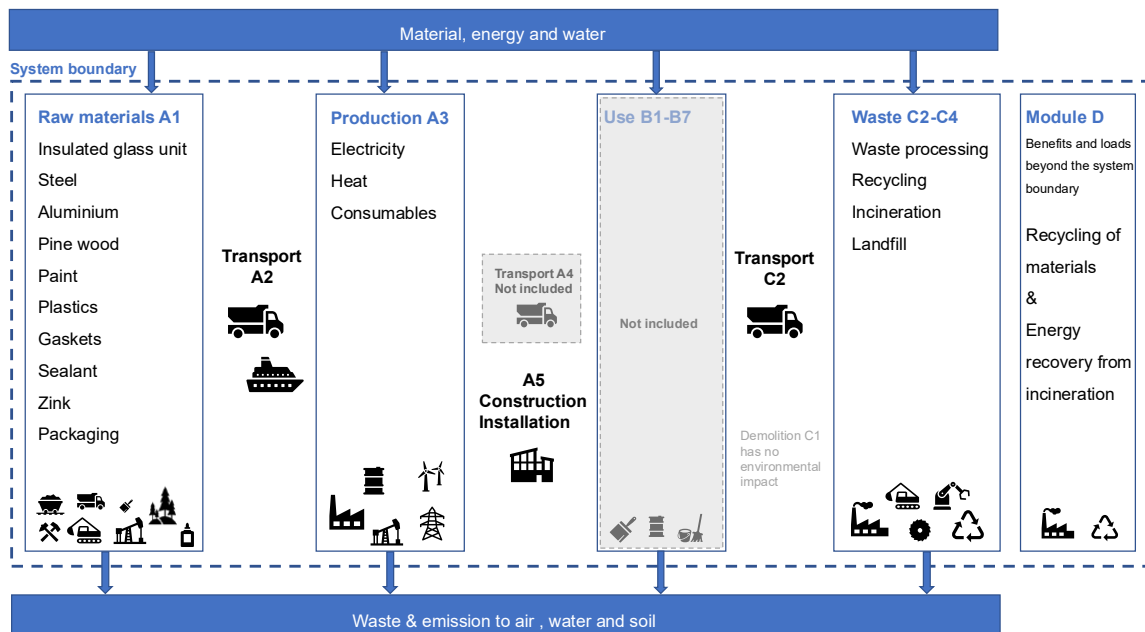

Production

Main materials used for production:

- Wood: Main raw material is finger-jointed and glued pine scantlings supplied by FSC/PFEC certified suppliers.
- Aluminium: Extruded profiles are produced in Sweden; later profiles are either powder coated in Poland or anodized in Sweden.
- Glass: The Insulation Glass Units are purchased ready-made from supplier in Europe.
- Paint: Water-based paint that can be tinted into all RAL classic and NCS-S colors.

Wood waste is utilized internally in bio boilers, that supply heat for both process and heating needs; all aluminium waste is sent for recycling.

All raw materials are processed in production facilities in Edsbyn, Sweden.

Manufacturing process consists of:

- Frame production. Wood material is cut to length, profiled, milled, impregnated, and painted.
- Sash production. Aluminium profiles are cut to length, drilled/milled, assembled to a sash.
- Final assembly. Frames and sashes are assembled into complete windows, and adjusted in a way that prevents the need for further adjustments during installation.

- Packaging. Windows are then protected with cardboard corners and packed on wooden pallets, secured by wooden planks. Pallets are wrapped with plastic foil, to protect the products from environmental elements during transport and storage at construction sites.
- Shipping. Windows are transported by trucks to distribution centres in Norway, where they are bundled and sent to final customers.

More information:

This EPD is generated with a pre-verified EPD tool. All processes are fixed and variable input data for each window i.e. constituent material/components (Items) is governed by a menu. The results of the EPD are checked for plausibility. The review of the EPD-generator its constituent processes and the fixed content of the EPD is accepted based on the verification of the tool and the first EPD verification by the tool. Identification name and version number of the EPD-generator: Dovista EPD-generator 3.0.

EN 15804 reference package based on EF 3.1 has been used.

Electricity data

Svenska Fönster AB (Snickarvägen 12, 828 30 Edsbyn, Sweden) has 100 percent original marked electricity. The company purchases electricity produced from renewable resources from Skellefteå Kraft. The energy mix purchased are 76% Hydro power and 24% wind power. Infrastructure and net losses for high and medium net are included together with transformation losses when going from high voltage to medium voltage. Climate impact for the green energy mix is 0,019 kg CO₂eq. per kWh (GWP-100 IPCC2021).

Estimates and assumptions

For all wood and finger jointed wood, the average density of 500 kg/m³ is assumed.

A share of 100 % pine is assumed at the sawmill.

The electricity used at the production site is assumed to contain 24% wind power, 76% hydropower.

The water-based paint is assumed to have a density of 1,2 kg/l.

Unspecified modes of transport have been assumed to be trucks, or trucks and ferries.

All transport in A2, B4 and C2 is with EURO 5 and 6 trucks.

In the module B2, during maintenance:

- The window is assumed to require 60 ml detergent and 540 ml water per m² window and year. Density of detergent, 1 kg/l.
- Lubrication of moving parts in openable windows and balcony doors during maintenance is assumed to 10 ml per m² window/balcony door and year. Density of lubrication, 0,82 kg/l.
- Interior repainting is carried out on all products once every 20 years.
- Exterior repainting is carried out on products without aluminium cladding once every 5 years.

In the B4 module, the glass cassette is replaced once after 30 years according to EN 17213 (SIS, 2020).

In the C1 module, the end-of-life scenario considered is that the window is demounted during the deconstruction process and no separate energy from machine is required for this process.

In module C2 the used window is transported to a municipal waste collection and sorting station, the average transport distance from the demolition place to the station is assumed to be 50 km.

For calculations in module C2, C3 and C4 the following assumptions have been made:

- 70% of the glass cassette is transported 50 km to a facility for landfill and disposed. 30% is transported 50 km to facility for recycling (SIS (2020)).
- 95% of the aluminum, steel and zinc is assumed to be transported 50 km to a facility where its treated (fragmentized and sorted). 5% is transported 50 km to facility for landfill and disposed.
- 95% of the wood frame is transported 50 km to a facility where its treated (chipped) and incinerated. 5% is transported 50 km to facility for landfill and disposed. The uptake of biogenic carbon in A1 is released during the incineration.
- 95% of plastic and EPDM is transported 50 km to a facility and incinerated. 5% is transported 50 km to facility for landfill and disposed.

For calculations in Module D the following assumptions have been made:

- The recycled steel and aluminium are replacing production of primary steel and aluminium.
- Module D also contains benefits from exported energy from waste incineration declared in module C.
- Exported energy assumed to be 77% heat and 23% electricity from incineration.

Background data

The data quality of the background data is considered good. The assessment considers all available data from the production process, including all raw materials and auxiliary materials used as well as the energy consumption in relation to available Ecoinvent 3.9.1 datasets and EPD's.

The infrastructure or capital goods used in the product system for underlying processes are included for upstream and downstream processes, as infrastructure or capital goods can NOT be excluded in SimaPro FLOW. Therefore results of the impact categories abiotic depletion of minerals and metals, land use, human toxicity (cancer), human toxicity, noncancer and ecotoxicity (freshwater) may be highly uncertain in LCAs that include capital goods/infrastructure in generic datasets, in case infrastructure/capital goods contribute greatly to the total results. This is because the LCI data of infrastructure/capital goods used to quantify these indicators in currently available generic datasets sometimes lack temporal, technological and geographical representativeness. Caution should be exercised when using the results of these indicators for decision-making purposes. For core module infrastructure or capital goods are excluded.

Results for the additional impact categories particulate matter, ionizing radiation, ecotoxicity (freshwater), human toxicity (cancer), human toxicity (non-cancer) and Land use is not declared.

EPD used for background data

Hydro Aluminium extrusion profiles with REDUXA S-P-07377

Insulight Triple IGU S-P-02592

Data quality

When modeling in Simapro, Ecoinvent data (updated November 2022) has been used for generic data. The database is considered to be of high quality. For some material supplier's product specific and third party verified EPD's has been used. The EPD's used is of high quality.

Other Indata gathered from the actual manufacturing plant with product-specific processes, specific amounts, specific waste, and spillage %, specific energy mix, specific transportation distances and transportation type and EPD's from some of the suppliers are primary data.

Primary data are collected directly from supplier and production site.

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	X	ND	X	ND	X	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	NO	ND	EU	ND	NO	ND	NO	ND	ND	ND	EU	EU	EU	EU	EU
Specific data used	65% *			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-

*See data quality

Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight % and kg C/declared unit
Plastic	0.43	0.00 %	0.00 %
Aluminium	2.41	0.00 %	0.00 %
EPDM	0.12	0.00 %	0.00 %
Sealant and Glue	0.04	0.00 %	0.00 %
Steel	1.67	24.39 %	0.00 %
Wood	7.85	0.00 %	100.00 % and 3.93
Insulated Glass unit	22.16	0.00 %	0.00 %
TOTAL	34.68	1.18 %	22.65 % and 3.93
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/declared unit
Wood	0.33	0.95 %	0.16
Plastic	0.08	0.24 %	0.00
Cardboard & Paper	0.30	0.87 %	0.15
TOTAL	0.71	2.06 %	0.31
Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional or declared unit
-	-	-	0.00

Environmental Information

Potential environmental impact – mandatory indicators according to EN 15804

Results per 1 m ²											
Indicator	Unit	A1-A3	A4	A5	B2	B4	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	7.29E+01	0.00E+00	9.59E-03	1.45E+00	2.71E+01	0.00E+00	6.42E-01	1.69E+00	9.40E-02	- 3.17E+01
GWP-biogenic	kg CO ₂ eq.	- 1.11E+01	0.00E+00	5.33E-01	-8.82E-01	2.52E-02	0.00E+00	5.81E-04	1.23E+01	6.35E-01	0.00E+00
GWP-luluc	kg CO ₂ eq.	2.16E-01	0.00E+00	3.70E-06	1.14E+00	1.10E-01	0.00E+00	3.12E-04	4.02E-04	1.88E-05	-3.64E-01
GWP-total	kg CO ₂ eq.	6.20E+01	0.00E+00	5.42E-01	1.71E+00	2.73E+01	0.00E+00	6.43E-01	1.40E+01	7.29E-01	- 3.21E+01
ODP	kg CFC 11 eq.	5.86E-06	0.00E+00	2.58E-10	1.12E-07	2.70E-06	0.00E+00	1.40E-08	1.84E-08	3.33E-09	-8.01E-07
AP	mol H ⁺ eq.	4.10E-01	0.00E+00	2.11E-04	1.93E-02	1.51E-01	0.00E+00	2.09E-03	1.58E-02	5.99E-04	-2.15E-01
EP-freshwater	kg P eq.	1.36E-02	0.00E+00	7.29E-07	1.07E-02	5.07E-03	0.00E+00	4.49E-05	1.47E-04	4.45E-06	-1.47E-02
EP-marine	kg N eq.	8.87E-02	0.00E+00	9.78E-05	8.90E-03	3.13E-02	0.00E+00	7.20E-04	7.16E-03	2.60E-04	-3.38E-02
EP-terrestrial	mol N eq.	1.02E+00	0.00E+00	1.13E-03	3.57E-02	3.88E-01	0.00E+00	7.60E-03	8.06E-02	2.79E-03	-3.49E-01
POCP	kg NMVOC eq.	2.93E-01	0.00E+00	3.11E-04	1.91E-02	9.55E-02	0.00E+00	3.13E-03	2.58E-02	1.12E-03	-1.24E-01
ADP-minerals & metals*	kg Sb eq.	9.06E-04	0.00E+00	2.61E-08	2.72E-05	3.87E-04	0.00E+00	2.06E-06	8.31E-06	1.01E-07	-9.52E-05
ADP-fossil*	MJ	1.04E+03	0.00E+00	1.37E-01	3.58E+01	3.63E+02	0.00E+00	9.10E+00	5.63E+00	2.42E+00	- 4.46E+02
WDP*	m ³	3.18E+01	0.00E+00	1.29E-02	4.01E+00	1.80E+01	0.00E+00	5.29E-02	3.52E-01	1.23E-01	- 3.08E+01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption										

Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

**Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.*

Potential environmental impact – additional mandatory and voluntary indicators

Results per 1 m ²											
Indicator	Unit	A1-A3	A4	A5	B2	B4	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	7.33E+01	0.00E+00	1.03E-02	2.66E+00	2.73E+01	0.00E+00	6.43E-01	1.88E+00	9.50E-02	- 3.22E+01

Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Use of resources

Results per 1 m ²											
Indicator	Unit	A1-A3	A4	A5	B2	B4	C1	C2	C3	C4	D
PERE	MJ	6.15E+02	0.00E+00	2.00E-03	2.86E+01	3.15E+01	0.00E+00	1.41E-01	2.20E+00	4.78E-02	- 1.54E+02
PERM*	MJ	1.52E+02	0.00E+00	0.00E+00	0.00E+00	1.10E+00	0.00E+00	0.00E+00	- 1.43E+02	- 7.54E+00	0.00E+00
PERT	MJ	7.67E+02	0.00E+00	2.00E-03	2.86E+01	3.26E+01	0.00E+00	1.41E-01	- 1.41E+02	- 7.49E+00	- 1.54E+02
PENRE	MJ	1.08E+03	0.00E+00	1.47E-01	3.93E+01	3.62E+02	0.00E+00	9.68E+00	5.88E+00	2.58E+00	- 4.75E+02
PENRM*	MJ.	2.32E+01	0.00E+00	0.00E+00	0.00E+00	9.23E-01	0.00E+00	0.00E+00	- 1.48E+01	-7.80E-01	0.00E+00
PENRT	MJ	1.11E+03	0.00E+00	1.47E-01	3.93E+01	3.63E+02	0.00E+00	9.68E+00	- 8.94E+00	1.80E+00	- 4.75E+02
SM	kg	4.32E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m ³	1.73E+00	0.00E+00	4.44E-04	2.41E-01	2.87E-03	0.00E+00	2.08E-03	1.09E-02	3.08E-03	-9.82E-01
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water										

Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C.

**For the PERM and PENRM the new "GUIDANCE TO CALCULATING THE PRIMARY ENERGY USE INDICATORS" in Annex 3 of the PCR is followed and calculated according to option A.*

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Waste production and output flows

Waste production

Results per 1 m ²											
Indicator	Unit	A1-A3	A4	A5	B2	B4	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3.77E+01	0.00E+00	0.00E+00	3.91E-03	2.55E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-hazardous waste disposed	kg	1.30E+01	0.00E+00	0.00E+00	3.01E-02	2.80E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Radioactive waste disposed	kg	5.00E-02	0.00E+00	0.00E+00	1.17E-05	8.57E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C

Output flows

Results per 1 m ²											
Indicator	Unit	A1-A3	A4	A5	B2	B4	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	2.77E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.49E-01	0.00E+00	1.05E+01	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, electricity	MJ	1.39E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.62E+01	0.00E+00	0.00E+00
Exported energy, thermal	MJ	4.64E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.21E+02	0.00E+00	0.00E+00

Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C

Additional information

ID: EPD Calculation Svenska Fönster Dovista 17-06-2025 14:52

References

Ecoinvent. < <https://ecoinvent.org/the-ecoinvent-database/> >

General Programme Instructions of the International EPD System. Version 4.0.

LCA report EPD-GENERATOR 2.0 (2023-03-16).

PCR 2019:14 Construction products (EN 15804:A2) (1.3.4).

PCR 2019:14-c-PCR-007 c-PCR-007 Windows and doors (EN 17213) (2020-04-09).

SIS (2020). EN 17213:2020, Windows and doors - Environmental Product Declarations - Product category rules for windows and pedestrian doorsets. Svenska Institutet for Standarder.

SIS (2021). EN 15804:2012+A2:2019, Sustainability of construction works - Environmental product declarations – Core rules for the product category of construction products. Svenska Institutet for Standarder.

